



# Thank You!

---

**You have successfully downloaded your document from Workbenchmagazine.com. Below are some tips for Trouble-Free Printing**

- 1)** Clear printer memory. If you are unable to print this document, turn off your printer for at least 15 seconds and try again.
- 2)** Print two or three pages at a time. If clearing the printer memory didn't help, try printing only two or three pages at one time, rather than sending the entire file
- 3)** If a document is required to be at an accurate scale set the page scaling option to "none" in your printer settings.
- 4)** Get advanced printer help. Visit Adobe Support for instructions in troubleshooting common printer problems.

<http://www.adobe.com/support/techdocs/316508.html>

## MATERIALS LIST



### MATERIALS

Part	Qty	T	W	L	Material	Part	Qty	T	W	L	Material		
<b>Pedestal Cases</b>						<b>V</b>	Lower Drawer Divider	1	1/2"	9 15/16"	9"	Maple	
<b>A</b>	Top/Bottom Panels	4	3/4"	10 1/2"	22 1/2"	Maple Plywood	<b>W</b>	Drawer Bottoms	3	1/4"	9"	21 1/2"	Maple Plywood
<b>B</b>	Side Panels	3	3/4"	22 1/2"	25 1/4"	Maple Plywood	<b>X</b>	Top Drawer False Front	1	3/4"	4 3/4"	10 1/4"	Maple
<b>C</b>	Narrow Side Panel	1	3/4"	16 1/2"	25 1/4"	Maple Plywood	<b>Y</b>	Middle False Front	1	3/4"	6 3/4"	10 1/4"	Maple
<b>D</b>	Back Panels	2	3/4"	10 1/2"	25 1/4"	Maple Plywood	<b>Z</b>	Lower False Front	1	3/4"	11 1/4"	10 1/4"	Maple
<b>E</b>	Side Panel Edging	9	3/4"	3/4"	25 1/4"	Maple	<b>Desk Top</b>						
<b>F</b>	Top/Bottom Edging	4	3/4"	3/4"	10 1/2"	Maple	<b>AA</b>	Top	1	3/4"	24 1/4"	60"	Maple Plywood
<b>G</b>	Adjustable Shelf	1	3/4"	10 7/16"	11 1/4"	Maple Plywood	<b>BB</b>	Frame Ends	2	1"	3"	30 3/4"	Maple
<b>H</b>	Shelf Edging	1	3/4"	3/4"	10 7/16"	Maple	<b>CC</b>	Frame Front/Back	2	1"	3"	66"	Maple
<b>I</b>	Access Panel Slats	3	3/4"	3/4"	22"	Maple	<b>DD</b>	Riser	1	3/4"	2"	30"	Maple
<b>J</b>	Access Panel Cleats	2	3/4"	3/4"	5 1/4"	Maple	<b>EE</b>	Shelf	1	3/4"	5"	36"	Maple
<b>K</b>	Access Panel Stop	1	3/4"	3/4"	7"	Maple	<b>FF</b>	Back Rail	1	3/4"	3 3/8"	30"	Maple
<b>Pedestal Bases</b>						<b>Keyboard Tray</b>							
<b>L</b>	Base Sides	4	3/4"	4"	24 13/16"	Maple	<b>GG</b>	Tray	1	3/4"	17 1/4"	27"	Maple Plywood
<b>M</b>	Base Fronts/Backs	4	3/4"	4"	12"	Maple	<b>HH</b>	Tray Edging	1	3/4"	3/4"	27"	Maple
<b>N</b>	Base Cleats	8	3/4"	2 1/4"	11 1/2"	Maple	<b>II</b>	Tray Sides	2	3/4"	2 3/4"	18"	Maple
<b>Drawers</b>						<b>JJ</b>	Tray Front	1	3/4"	2 1/2"	29 3/4"	Maple	
<b>O</b>	Upper Drawer Sides	2	1/2"	3 3/4"	22"	Maple	<b>Doors</b>						
<b>P</b>	Middle Drawer Sides	2	1/2"	5 3/4"	22"	Maple	<b>KK</b>	Top Rails	2	3/4"	2 1/2"	8"	Maple
<b>Q</b>	Lower Drawer Sides	2	1/2"	10 1/4"	22"	Maple	<b>LL</b>	Bottom Rails	2	3/4"	3 1/2"	8"	Maple
<b>R</b>	Upper Front/Back	2	1/2"	3 3/4"	9"	Maple	<b>MM</b>	Stiles	4	3/4"	2"	24 3/4"	Maple
<b>S</b>	Middle Front/Back	2	1/2"	5 3/4"	9"	Maple	<b>NN</b>	Loose Tenons, Top	4	3/8"	1 3/8"	1 15/16"	Maple
<b>T</b>	Lower Drawer Front	1	1/2"	10 7/16"	9"	Maple	<b>OO</b>	Loose Tenons, Bottom	4	3/8"	2 3/8"	1 15/16"	Maple
<b>U</b>	Lower Drawer Back	1	1/2"	10 1/4"	9"	Maple							

### HARDWARE & SUPPLIES


- (3) Brushed Nickel Knobs (#33678)\*
- (3) Pairs of 22" Full-Extension Drawer Slides (#32516)\*
- (1) Pair of 18" Full-Extension Keyboard Slides (#36304)\*
- (1) Wire Management Tray (#13665)\*
- (2) Textured Glass (#38821)\*
- (2) Pairs of Partial Wrap-Around Hinges (#49393)\*
- (8) 1 1/16" dia. Adjustable Levelers (#18631)\*
- (8) 1/4"-20 T-nuts (#26054)\*
- (3) Lengths of 1/8" x 3/4" Aluminum Bar Stock
- (1) Pair 1 1/2" x 2 7/8" Brass Butler Hinges (#60624)\*
- (1) Pair 9/16" x 3" Double Keyhole Fittings (#28829)\*
- (4) #8 x 1 1/4" Panhead Sheet Metal Screws
- (60) #8 x 1 1/4" Flathead Woodscrews
- (8) #8 x 1" Flathead Woodscrews
- (8) #12 x 1 1/4" Flathead Woodscrews
- (1) CD Holder (#30536)\*
- 1/8" hardboard splines x 1 5/16" wide (16 lin. ft.)
- Clear Silicone Caulk
- #20 Biscuits

\* Available from [www.Rockler.com](http://www.Rockler.com)




Desk Cutting Diagram  
[WorkbenchMagazine.com](http://WorkbenchMagazine.com)


## CUTTING DIAGRAM

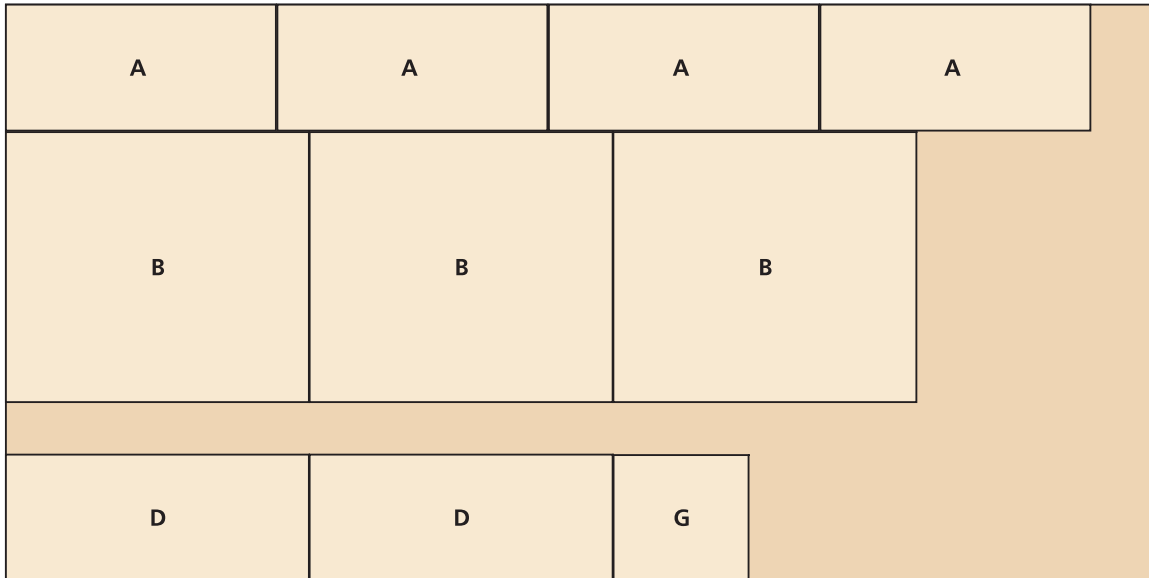

$\frac{3}{4}$ " x 48" x 96" MAPLE PLYWOOD

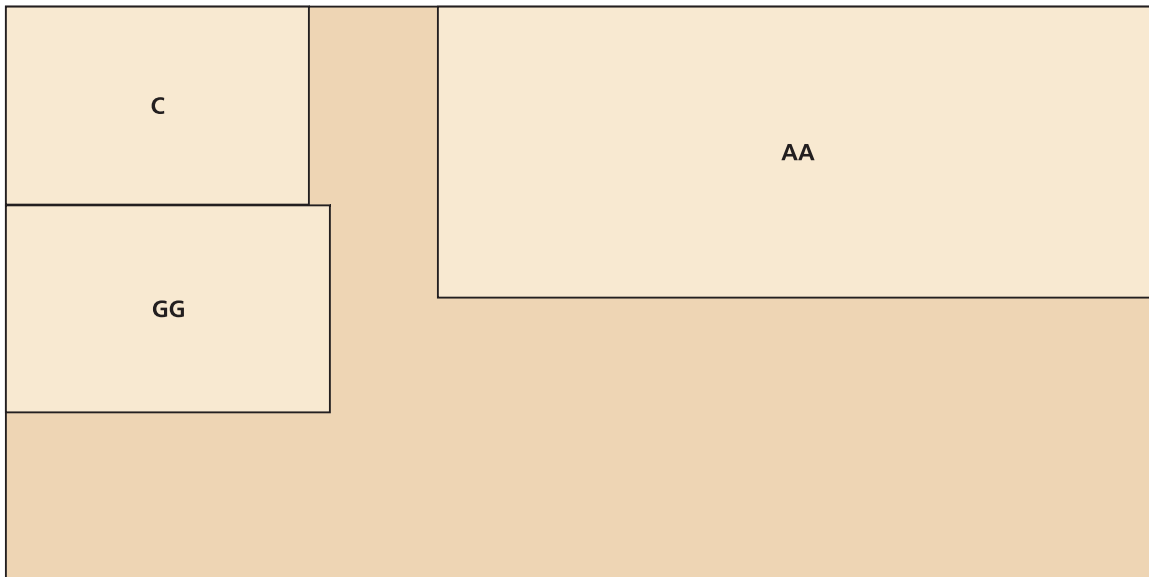


$\frac{3}{4}$ " x 48" x 96" MAPLE PLYWOOD

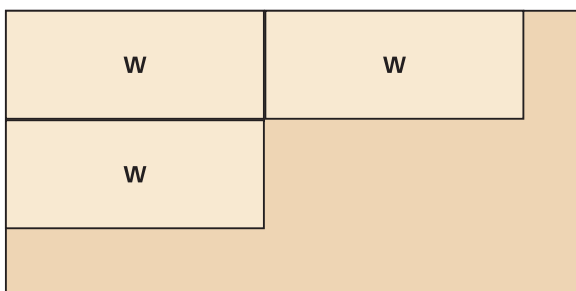

$\frac{1}{4}$ " x 24" x 48" MAPLE PLYWOOD


## CUTTING DIAGRAM




3/4" x 5" x 96" MAPLE



3/4" x 5" x 96" MAPLE




3/4" x 5" x 96" MAPLE




3/4" x 7" x 96" MAPLE


**NOTE:** Glue up both Z pieces to make lower drawer false front (Z).



3/4" x 7" x 96" MAPLE



1/2" x 6" x 96" MAPLE




1/2" x 6" x 96" MAPLE



1/2" x 6" x 96" MAPLE

**NOTE:** Glue up two Q pieces to make each lower drawer side (Q).



1" x 7" x 108" MAPLE